

# MDrive<sup>®</sup> Plus

Stepper motors with integrated electronics



**MDrive 17 Plus Motion Control**  
fully programmable



MDrive® Plus Motion Control, fully programmable

### Presentation

The MDrive® Plus Motion Control is a 1.8° 2-phase stepper motor with on-board fully programmable motion controller, drive electronics and optional encoder. This means MDrive Plus Motion Control products are stand-alone motion control solutions that can be used without any external controller.

Programming of MDrive Plus Motion Control products with RS-422/485 interface is accomplished with MCode, simple 1 to 2 character instructions, using the IMS Terminal software tool. MDrive Plus Motion Control products may also be equipped with encoders for stall detection, position maintenance and find index mark.

MDrive Plus Motion Control programming for Ethernet is accomplished with the same MCode instruction set used for the RS-422/485 products. Ethernet products also support MODBUS/TCP application protocol, per specification Version 1.1b, with operation in immediate mode, not as programmable products.

### Application areas

The MDrive Plus Motion Control is ideal for machine builders who want an optimized motor with on-board electronics. The integrated electronics of the fully programmable MDrive Plus Motion Control reduces the potential for problems due to electrical noise by eliminating the cable between motor and drive.

These compact, powerful and cost effective motion control solutions deliver unsurpassed smoothness and performance that will reduce system cost, design and assembly time for a large range of 2-phase stepper motor applications.

### Features

#### Standard Plus

- Highly integrated microstepping drive and high torque 1.8° 2-phase stepper motor
- Advanced current control for exceptional performance and smoothness
- Single supply: from +12 up to +75 VDC or 120 and 240 VAC
- Cost effective
- Extremely compact
- 20 microstep resolutions to 51,200 steps/rev including: Degrees, Metric, Arc Minutes
- Auxiliary logic power supply input
- Open or optional closed loop control
- Programmable motor run and hold currents
- Four +5 to +24 VDC I/O lines accept sourcing or sinking outputs
- One 10 bit analog input selectable: 0 to +10 VDC, 0 to +5 VDC, 0-20 mA, 4-20 mA
- 0 to 5 MHz step clock rate selectable in 0.59 Hz increments
- RS-422/485 or Ethernet communication protocols (1)
- 62 software addresses for multi-drop communications (2)
- Simple 1 to 2 character instructions
- Available options:
  - Long life linear actuators (3)
  - Hybrid Motion Technology™ (3)
  - Encoders
  - Control knob for manual positioning
  - Industrial connectors with IP54 rating (4)
- Several motor stack lengths available
- Graphical user interface provided for quick and easy configuration and programming

#### Expanded Plus<sup>2</sup>

- +24 VDC tolerant I/O sourcing or sinking, inputs and outputs with up to 8 I/O lines and electronic gearing
- Closed loop control available with external / remote encoder option
- High speed position capture input or trip output

(1) Ethernet only available for MDrive23 products.

(2) Only with RS-422/485 products.

(3) See separate documentation.

(4) Industrial connectors are unavailable for MDrive14 or MDrive34 products.

### Standard Plus specifications

		MDrive 14	MDrive 17	MDrive 23 (1)	MDrive 23 (1)	MDrive 34	MDrive 34ac	
Input power	Voltage	VDC	12 to 48	12 to 48	12 to 75	12 to 60	12 to 75	—
		VAC	—	—	—	—	—	120
	Current maximum (2)	1A	2A	2A	3.5A	4A	95 to 132 VAC @ 50/60 Hz	95 to 264 VAC @ 50/60 Hz
Thermal	Operating temp non-condensing	Heat sink	-40° to +85°C				-40° to +75°C	
		Motor	-40° to +100°C				-40° to +90°C	
Protection	Type	not applicable					- Thermal - Over voltage / current	

Aux. logic input voltage	Range	+12 to +24 VDC <i>When input voltage is removed, maintains power only to control and feedback circuits.</i>						
Analog input	Resolution	10 bit						
	Voltage range	0 to +5 VDC, 0 to +10 VDC, 0-20 mA, 4-20 mA						
General purpose I/O	Number	4						
	Type	sourcing or sinking inputs, or sinking outputs						
	Logic range	Inputs and outputs tolerant to +24 VDC, inputs TTL level compatible						
	Output sink current	Up to 600 mA						
	Protection	Over temp, short circuit, transient over voltage, over voltage, inductive clamp						
Communication	Type	RS-422/485 or Ethernet (3)						
	Baud rate	4.8 to 115.2 kbps						
Motion	Open loop configuration	Number of settings	20					
		Steps per revolution	200, 400, 800, 1000, 1600, 2000, 3200, 5000, 6400, 10000, 12800, 20000, 25000, 25600, 40000, 50000, 51200, 36000 (0.01 deg/μstep), 21600 (1 arc minute/μstep), 25400 (0.001mm/μstep)					
	Closed loop configuration (requires encoder option)	Encoder resolution	512 lines/2048 edges per rev					
		Counters	Type	position, encoder/32 bit				
	Velocity	Edge rate maximum	5 MHz					
		Range	+/- 5,000,000 steps per second					
	Accel/Decel	Resolution	0.5961 steps per second					
		Range	1.5 x 10 <sup>9</sup> steps per second <sup>2</sup>					
	Software	Resolution	90.9 steps per second <sup>2</sup>					
		Program storage	Type/size	flash/6384 bytes				
User registers		Four 32 bit						
User program labels & variables		192						
Math functions		+, -, ×, ÷, >, <, =, <=, >=, AND, OR, XOR, NOT						
Branch functions		Branch and Call						
General purpose I/O functions		Inputs	home, limit plus, limit minus, go, stop, pause, jog plus, jog minus, general purpose					
		Outputs	moving, fault, stall, velocity change, general purpose					
Trip functions	Trip on input, trip on position, trip on time, trip capture, trip on relative position							
Party mode addresses	62 (4)							
Encoder functions	Stall detection, position maintenance, find index							

### Expanded Plus<sup>2</sup> specifications (5)

General purpose I/O	Number	8 (or 4 when remote encoder option is selected)					
	Type	sourcing or sinking outputs/inputs					
	Logic range	Sourcing outputs +12 to +24 VDC, inputs and sinking outputs tolerant to +24 VDC, inputs TTL level compatible					
	Output sinking current	Up to 600 mA					
Motion	Electronic gearing	Range/resolution/ threshold – external clock in (6)		0.001 to 2.000/32 bit/TTL			
		Input filter range		50 nS to 12.9 μS (10 MHz to 38.8 kHz)			
		Range – secondary clock out (6)		1 to 1			
	High speed I/O	Position capture	Input filter range	50 nS to 12.9 μS (10 MHz to 38.8 kHz)			
			Resolution	32 bit			
		Trip output/input – speed/resolution/ threshold		150 nS/32 bit/TTL			
	Closed loop configuration (requires remote encoder)	Steps per revolution		Same as Standard Plus specification shown in section above			
		Encoder type		User-supplied differential encoder			
Encoder resolution		User-defined					

(1) Only quad stack NEMA 23 motors have +12 to +60 VDC drives, all other NEMA 23 motors have +12 to +75 VDC drives.

(2) Actual power supply current will depend on voltage and load.

(3) Ethernet only available with MDrive23 Plus products.

(4) Only with RS-422/485 products.


(5) MDrive34ac products available only as Plus<sup>2</sup> versions.

(6) Adjusting the microstep resolution can increase the range.

See User Manual for complete details: [www.imschneider.com/manuals.html](http://www.imschneider.com/manuals.html)




### – Plus & Plus<sup>2</sup> – mechanical specifications, dimensions in inches (mm)

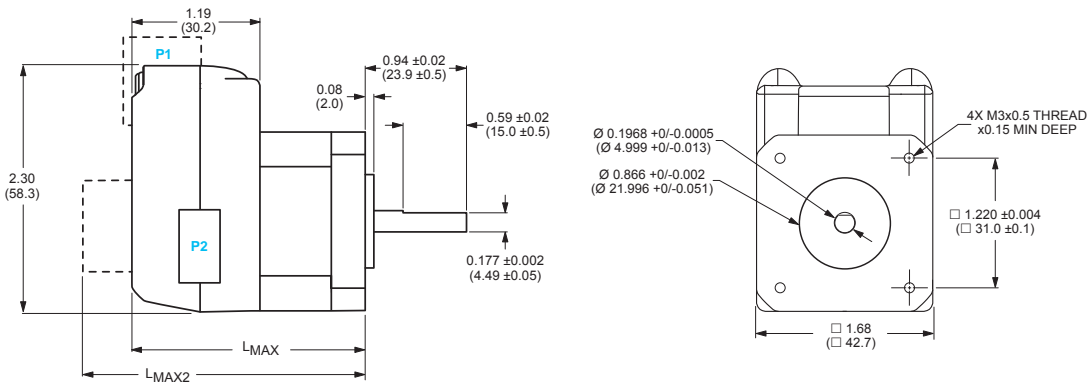


Motor stack length	Lmax (1)	Lmax2 (2)
Single	2.20 (55.9)	2.79 (70.9)
Double	2.43 (61.7)	3.02 (76.7)
Triple	2.77 (70.4)	3.37 (85.6)

(1) Single shaft or internal encoder.  
 (2) Control knob or external encoder.


#### P1 connector options

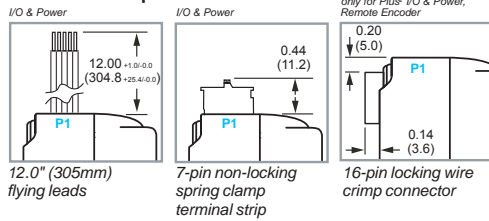


#### P2 connector options









#### Lmax2 option



### – Plus<sup>2</sup> with industrial connectors – mechanical specifications, dimensions in inches (mm)

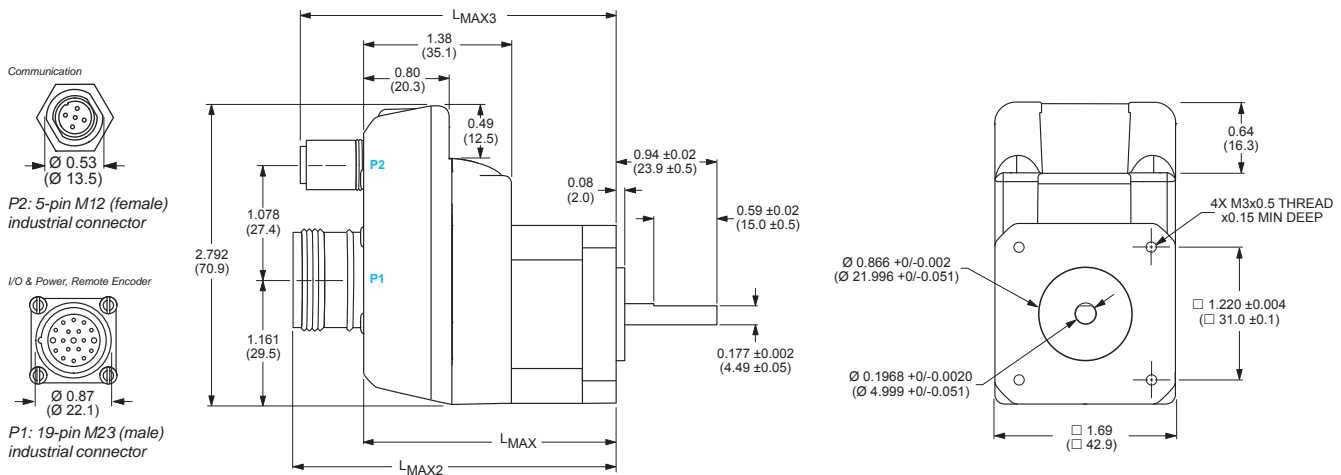

Motor stack length	Lmax	Lmax2	Lmax3
Single	2.39 (60.71)	3.06 (77.72)	2.99 (75.95)
Double	2.62 (66.55)	3.29 (83.57)	3.22 (81.79)
Triple	2.96 (75.18)	3.63 (92.20)	3.56 (90.42)

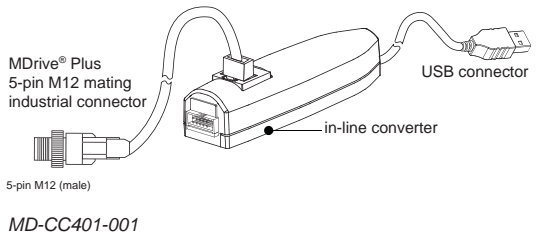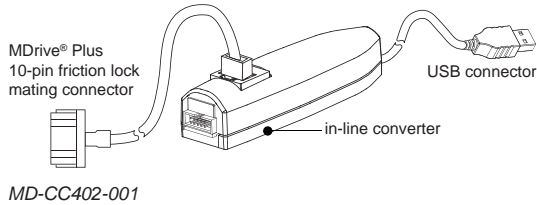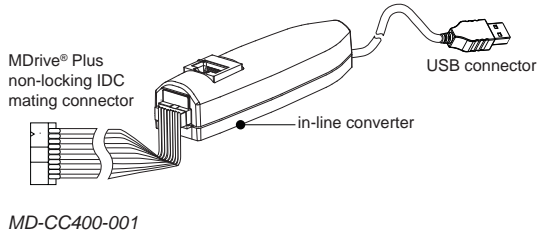

### Installation accessories

Description	Length feet (m)	Part number
-------------	-----------------	-------------

#### QuickStart Kit

For rapid design verification, all-inclusive QuickStart Kits include connectivity, instructions and CD for MDrive Plus initial functional setup and system testing.

- For MDrive17 Motion Control products — add "K" to part number (1)

#### Communication converter

Electrically isolated, in-line converter pre-wired with mating connector to conveniently set/program communication parameters for a single MDrive Plus via a PC's USB port.

■ Mates to 10-pin non-locking IDC connector	12.0 (3.6)	MD-CC400-001
■ Mates to 10-pin friction lock wire crimp connector	12.0 (3.6)	MD-CC402-001
■ Mates to 5-pin female M12 industrial connector	12.0 (3.6)	MD-CC401-001

#### Prototype development cable

Speed test/development with pre-wired mating connector with other cable end open.

■ Mates to 10-pin friction lock wire crimp connector for communication	10.0 (3.0)	PD10-1434-FL3
■ Mates to 16-pin locking wire crimp connector for I/O, power and remote encoder option	10.0 (3.0)	PD16-1417-FL3
■ Mates to 19-pin male M23 industrial connector with straight termination for I/O, power and remote encoder option	13.0 (4.0)	MD-CS100-000
■ Mates to 19-pin male M23 industrial connector with right angle termination for I/O, power and remote encoder option	13.0 (4.0)	MD-CS101-000

#### Mating connector kit

Connectors for assembly of cables, cable material not supplied. Sold in lots of 5. Manufacturer's crimp tool recommended for crimp connectors.

■ 10-pin friction lock wire crimp connector for communication	—	CK-02
■ 10-pin non-locking IDC connector for communication	—	CK-01
■ 16-pin locking wire crimp connector for I/O, power and remote encoder option	—	CK-10

#### Drive protection module

Limits surge current and voltage to a safe level when DC input power is switched on-and-off to an MDrive Plus.

- For all MDrive17 Motion Control products — DPM75

(1) See next page.




Connectivity details: [www.imschneider.com/connect.html](http://www.imschneider.com/connect.html)

# MDrive® 17 Plus


## Motion Control

fully programmable


MDrive® 17 Plus

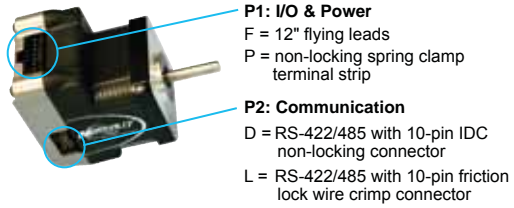

MDrive® 17 Plus<sup>2</sup>

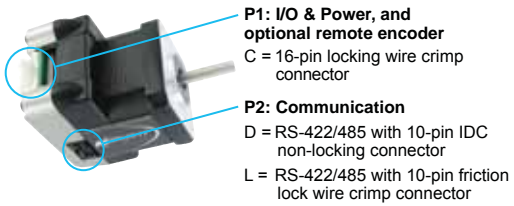

MDrive® 17 Plus<sup>2</sup>  
with industrial connectors

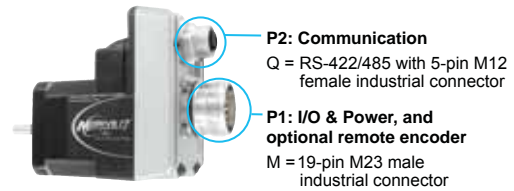

Part numbers												
<b>Example:</b>	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>QuickStart Kit</b> K = kit option, or leave blank if not wanted	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>MDrive Plus version</b> MDI = Motion Control	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Input</b> 1 = Plus, standard features 3 = Plus <sup>2</sup> , expanded features 4 = Plus <sup>2</sup> , expanded features, with industrial connectors, IP54-rated	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>P1 connector</b> F = flying leads P = pluggable C = wire crimp (1) M = M23 industrial connector (2)	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Communication</b> R = RS-422/485	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>P2 connector</b> D = IDC L = wire crimp Q = M12 industrial connector (2)	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Motor size</b> 17 = NEMA 17 (1.7" / 42 mm)	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Motor length</b> A = single stack B = double stack C = triple stack	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Drive voltage</b> 4 = +12 to +48 VDC	K	M	D	I	1	F	R	D	1	7	A	4 -EQ
<b>Options</b> Leave blank if not wanted Options may be combined, unless noted												-EQ
-EQ												= internal encoder, 512-line internal magnetic encoder with index mark
-EE												= remote encoder interface, differential encoder to be provided by user <i>Available with Plus<sup>2</sup> versions only. May not be combined with internal encoder option.</i>
-N												= rear control knob for manual positioning (3)

(1) Only available with Plus<sup>2</sup> products without industrial connectors.

(2) Only available with Plus<sup>2</sup> products with industrial connectors.

(3) Not available with industrial connector products.



Easy MDrive part numbers via an interactive tool at:  
[www.imshome.com/MDrivePlus.html](http://www.imshome.com/MDrivePlus.html)

# MDrive<sup>®</sup> 17 Plus

Motion Control  
fully programmable


### Motor specifications MDrive 17

		Holding torque	Detent torque	Rotor inertia	Weight (motor + driver)
Motor stack length	Single	32.0 oz-in / 22.6 N-cm	1.66 oz-in / 1.17 N-cm	0.00053 oz-in-sec <sup>2</sup> / 0.038 kg-cm <sup>2</sup>	10.4 oz / 294.8 g
	Double	60.0 oz-in / 42.4 N-cm	2.08 oz-in / 1.47 N-cm	0.00080 oz-in-sec <sup>2</sup> / 0.057 kg-cm <sup>2</sup>	12.0 oz / 340.2 g
	Triple	74.9 oz-in / 52.9 N-cm	3.47 oz-in / 2.45 N-cm	0.00116 oz-in-sec <sup>2</sup> / 0.082 kg-cm <sup>2</sup>	15.2 oz / 430.9 g


### Speed torque characteristics MDrive 17

Single stack length      Double stack length      Triple stack length


Torque in Oz-In / N-cm

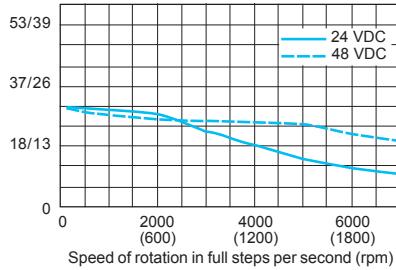

Torque in Oz-In / N-cm

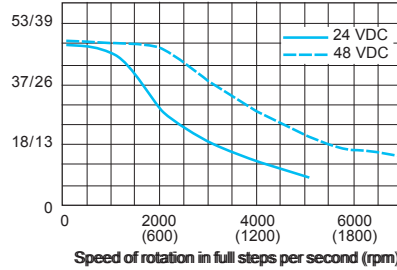

Torque in Oz-In / N-cm

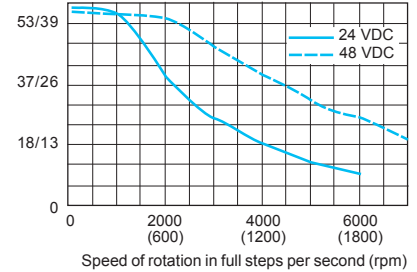

#### **USA SALES OFFICES**

##### **Eastern Region**

Tel. 862 208-9742 - Fax 973 661-1275

e-mail: [e.region@imshome.com](mailto:e.region@imshome.com)

##### **Northeast Region**

Tel. 860 368-9703

e-mail: [n.region@imshome.com](mailto:n.region@imshome.com)

##### **Central Region**

Tel. 860 295-6102

e-mail: [c.region@imshome.com](mailto:c.region@imshome.com)

##### **Western Region**

Tel. 602 578-7201

e-mail: [w.region@imshome.com](mailto:w.region@imshome.com)

#### **IMS EUROPEAN SALES MANAGEMENT**

4 Quai Des Etroits

69005 Lyon, France

Tel. +33/4 7256 5113 - Fax +33/4 7838 1537

e-mail: [europa.sales@imshome.com](mailto:europa.sales@imshome.com)

#### **TECHNICAL SUPPORT**

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107

e-mail: [etech@imshome.com](mailto:etech@imshome.com)

#### **Schneider Electric Motion USA**

370 North Main Street, P.O. Box 457

Marlborough, CT 06447 - U.S.A.

Tel. +00 (1) 860 295-6102 - Fax +00 (1) 860 295-6107

e-mail: [info@imshome.com](mailto:info@imshome.com)

[www.schneider-electric-motion.us](http://www.schneider-electric-motion.us)