

The drive series at a glance

DMR 50-5/50 dual axes drive



The perfect matched drive for enhancing motoroller 46 features

Features

- » Dual axes operation
- » 24 and 48 Vdc operating supply voltage
- » Encoder and Hall Sensor feedback
- » CanOpen Fieldbus
- » RS485 programming interface
- » I/O programmability for speed, start and stop control

Lite Pro drive



Lite Pro drive is ideal for controlling motoroller 60

Features

- » 24 and 48 Vdc operating supply voltage
- » Encoder and Hall Sensor feedback
- » CanOpen Fieldbus
- » I/O programmability for speed, start and stop control

DMR 76-10/65



Motoroller 76 matches drive DMR 76-10/65 for the perfect bundle

Features

- » 24 and 65 Vdc operating supply voltage
- » Encoder and Hall Sensor feedback
- » Profibus Fieldbus
- » I/O programmability for speed, start and stop control
- » I/O proxy dual loop

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DMR 50-5/50 DRIVE TYPE



DMR	50-5/50	E	C	0
Drive Name	Model	Feedback	Fieldbus	Input logic
	1	2	3	4

1	Drive model	50-5/50
2	Feedback	H = Hall sensor E = Incremental encoder
3	Fieldbus	C = CANopen
4	Input Logic	0 = PNP input 1 = NPN input

DMR 76-10/65 DRIVE TYPE



DMR	76-10/65	E	P
Drive Name	Model	Feedback	Fieldbus
	1	2	3

1	Drive model	76-10/65
2	Feedback	H = Hall sensor E = Incremental encoder
3	Fieldbus	P = Profibus

LITE PRO DRIVE TYPE



LPRO	E	40	C
Drive Name	Feedback	Model	Fieldbus
	1	2	3

1	Feedback	E = Hall sensor and encoder
2	Model (output current) Arms	40 = 8/24
3	Fieldbus	C = CANopen

DMR SERVO DRIVES

The DMR series is a series of customized drives dedicated to logistic automation market.

The series features two models: DMR 50-5/50 and DMR76-10/65, designed and manufactured for driving gearless motorrollers, exploiting its technological advantages based on direct drive without any gear for motion transmission.

DMR 50-5/50 FEATURES

- > **DUAL AXES OPERATION CAPABILITY**
- > **PERFECT MATCH WITH GEARLESS MOTORROLLER MTR46**
- > **I/O PROGRAMMABILITY**
- > **FUSE PROTECTION**
- > **CROSSBELT FUNCTIONALITY**
- > **CONVEYOR FUNCTIONALITY**
- > **SPEED AND ACCELERATION PROGRAMMABILITY**
- > **HALL SENSOR AND ENCODER FEEDBACK**
- > **DMR BROWSER SOFTWARE INTERFACE**
- > **RS 485 PROGRAMMING INTERFACE**
- > **CAN OPEN FIELDBUS**
- > **PHOTO EYE SUPPORT**
- > **2 INPUT, 2 OUTPUT RELAY EACH AXIS**





DMR 50-5/50 PRODUCT DATA

FEATURE	UNITS	DMR 50-5/50
Rated output power	W	180 each axis
Efficiency at rated power	%	>95
Operating supply voltage	Vdc	12-60
Typical supply voltage	Vdc	48
Maximum operating voltage	Vdc	80
Auxiliary supply voltage		24 V (8-30)
Rated output current	Arms	5
Peak output current	Arms	15
Peak time	s	3
PWM switching frequency	kHz	16 kHz
Maximum output frequency	Hz	<600
Commutation		Sinusoidal and space vector
Dimensions	WxDxH mm	196x70x27
Working temperature	°C	-20 ÷ +55
Storage temperature	°C	-40 ÷ +75
Humidity	%	85% not condensing
Altitude without derating	m	1000
IP protection	IP	20

SEE IT BEFORE IT HAPPENS

DMR 50-5/50 PRODUCT DIMENSIONS

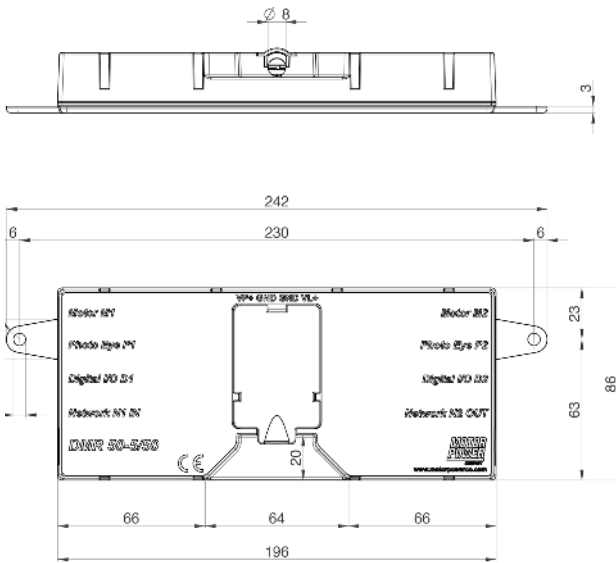

Dimensions in mm

DMR 50-5/50 PRODUCT DATA

MOTOR CONNECTION

PIN	NAME
1	Phase U
2	Phase V
3	Phase W
4	Thermal sensor
5	Power supply 5V
6	0V
7	Hall U/Inc A
8	Hall V/Inc B
9	Hall W/Inc Z

PHOTO EYE INPUT

PIN	NAME
1	24V
2	GND
3	Photo eye input

POWER CONNECTION

PIN	NAME
1	24V logic
2	0 V
3	48 V power

I/O DEFINITION

PIN	DIRECTION	FUNCTION
1	Input	Enable
2	Input	Dir
3	Input	Analog Input
4	Output	Fault
5	Output	Configurable

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DMR SERVO DRIVES

DMR 76-10/65 HP is a digital drive for motorollers in cross belt applications. Main features of this drive are current digital control achieved with the technique of vector space and updated with a 10 kHz frequency. Speed digital loop with proportional-integral compensator updated with 10 kHz frequency. Position digital loop with proportional compensator and handling of dead zone updated with 10 kHz frequency. Digital Profibus interface for connecting to supervisor PLC. Motor feedback interface via Hall sensors.

DMR 76-10/65 FEATURES

- > THE PERFECT MATCHED DRIVE FOR GEARLESS MOTOROLLER
- > DMR BROWSER SOFTWARE INTERFACE
- > FUSE PROTECTION
- > CROSSBELT FUNCTIONALITY
- > SPEED AND ACCELERATION PROGRAMMABILITY
- > HALL SENSOR AND ENCODER FEEDBACK
- > 2 INPUT, 2 OUTPUT RELAY
- > USB PROGRAMMING INTERFACE
- > PROFIBUS FIELBUS DP V1
- > I/O PROGRAMMABILITY
- > I/O PROXY DUAL LOOP



DMR 76-10/65 PRODUCT DATA

FEATURE	UNITS	DMR 76-10/65
Rated output power	W	650
Efficiency at rated power	%	>95
Operating supply voltage	Vdc	24-80
Typical supply voltage	Vdc	48-65
Maximum operating voltage	Vdc	85
Auxiliary supply voltage		-
Rated output current	Arms	10
Peak output current	Arms	50
Peak time	s	0,75 on 20s
PWM switching frequency	kHz	16 kHz
Maximum output frequency	Hz	<600
Commutation		Sinusoidal and space vector
Dimensions	WxDxH mm	250x150x45
Working temperature	°C	-20 ÷ +55
Storage temperature	°C	-40 ÷ +75
Humidity	%	85% not condensing
Altitude without derating	m	1000
IP protection	IP	54 on drive front 40 on the whole drive

SEE IT BEFORE IT HAPPENS

DMR 76-10/65

DMR 76-10/65 PRODUCT DATA


HARDWARE AND FIRMWARE CHARACTERISTICS

- > **ONE ELECTRONIC BOARD FOR CONTROL LOGIC AND POWER**
- > **ONE SUPPLY FOR ELECTRONIC CONTROL AND MOTOR OUTPUT STAGE**
- > **PROFIBUS SLAVE COMMAND INTERFACE WITH DIP SWITCH NODE ADDRESS SELECTION**
- > **USB DEVICE INTERFACE FOR CONFIGURATION AND MAINTENANCE**
- > **CONTROL THROUGH SINUSOISAL ALGORITHM AND HALL SENSOR FEEDBACK**
- > **GENERIC I/O PROGRAMMABILITY**
- > **I/O PROXI PROGRAMMABILITY**

INTERFACE

- > THIS DRIVE IS EQUIPPED WITH SOFTWARE USER INTERFACE "DMR BROWSER" FOR OPERATING, MONITORING AND SUPERVISION OF THE APPLICATION. REFER TO THE APPROPRIATE MANUAL FOR INSTALLATION INSTRUCTIONS AND USE.**

PRODUCT DIMENSIONS

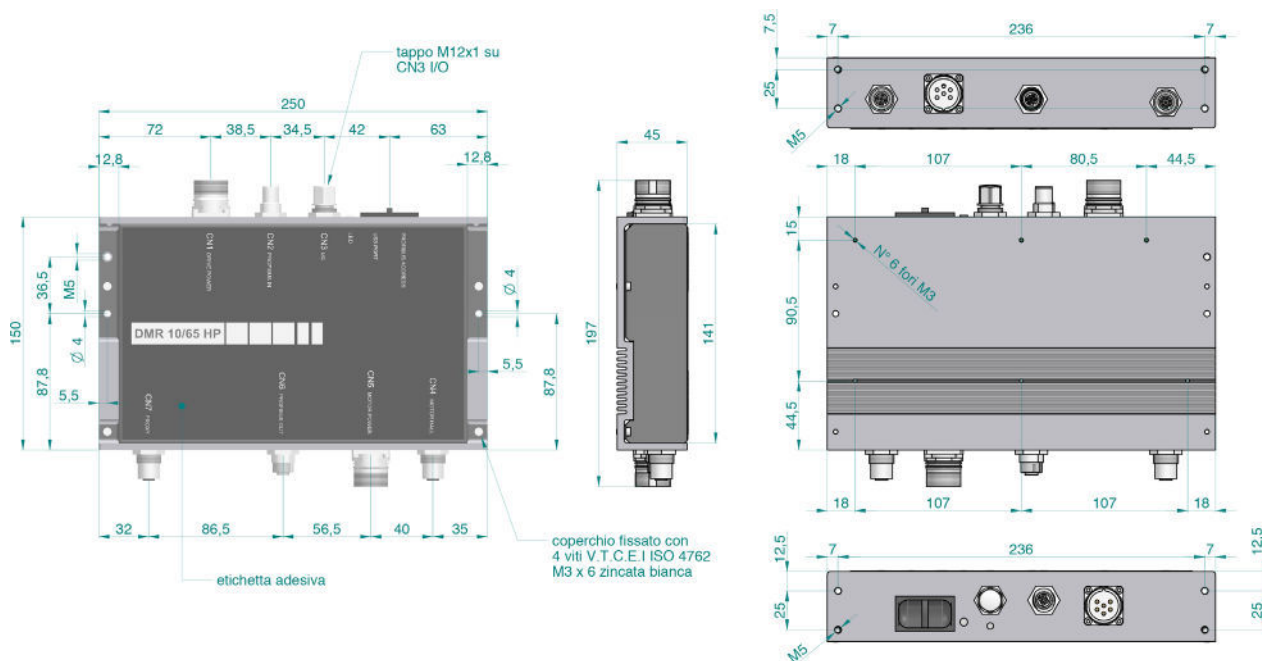

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY

DMR 76-10/65

CONNECTION

DRIVE POWER

PIN	NAME
1	V+
2	-
3	-
4	-
5	V-
6	-

PROFIBUS IN

PIN	NAME
1	-
2	DATA-/A-LINE
3	-
4	-
5	DATA+/B-LINE

PROFIBUS OUT

PIN	NAME
1	V+
2	DATA-/A-LINE
3	V _{REF}
4	DATA+/B-LINE
5	-

DIGITAL I/O

PIN	NAME
1	OUT1 COM
2	INRET 123
3	+24V _{DC}
4	OUT1 NC
5	IN1
6	IN2
7	IN3
8	GND (+24 V _{DC})

CONNECTION

MOTOR OUTPUT

PIN	NAME
1	-
2	U
3	V
4	W
5	-
6	PE

FEEDBACK

PIN	NAME
1	U/A
2	V/B
3	W/Z
4	5V _{DC}
5	GND

PROXY DUAL LOOP

PIN	NAME
1	+24V _{DC} PROXY
2	INRET 123 PROXY
3	GND (+24V _{DC})
4	OUT2 NO
5	OUT2 NO
6	IN7 PROXY
7	+24 V _{DC}
8	OUT2 COM

The LITE PRO series is represented by the extremely compact 4-quadrants drives perfect matched to control motoroller 60. This series features as standard CanOpen interface and a complete programmable version with integral Motion Process Unit, that allows stand alone and network architecture operation.

FEATURES

- > **STANDARD FEEDBACK TTL ENCODER AND HALL SENSOR**
- > **DIGITAL I/O: UP TO 8 DIGITAL INPUTS AND 1 OR 2 DIGITAL OUTPUTS CUSTOMIZABLE WITH SEVERAL BUILT-IN FUNCTIONS**
- > **CONTROL: STANDARD PI CONTROL LOOP**
- > **SERVO MODES: TORQUE, VELOCITY AND POSITION WITH S-CURVE PROFILE**
- > **INTERNAL SCRIPT**
- > **EXTREME COMPACT DESIGN**
- > **USB PROGRAMMING KEY**

INTERFACE

- > **ANALOG VELOCITY AND TORQUE COMMAND $\pm 10V$**
- > **CANopen**




COMPACT AND PROFITABLE

PRODUCT DATA

FEATURE	UNITS	LPRO E40
Input voltage	VDC	48
Efficiency at rated power	%	>95
Auxiliary supply voltage	VDC	9 ... 30
Continuous current	Arms	8
Peak current	Arms	24
Ambient operating temperature	°C	0 to + 40°
Maximum humidity	%	5÷85% not condensing
Mounting method		Wall mounting DIN Rail
Dimensions	LxWxH mm	110x22,5x77
Weight	gr	110
Digital IN		4
Digital OUT		1

LITE PRO USER INTERFACE

- > EASY AND INTUITIVE PC SOFTWARE ALLOWS A FAST
PARAMETERIZATION OF THE LITE PRO
- > SIMPLE SCOPE
- > SCRIPT EDITING

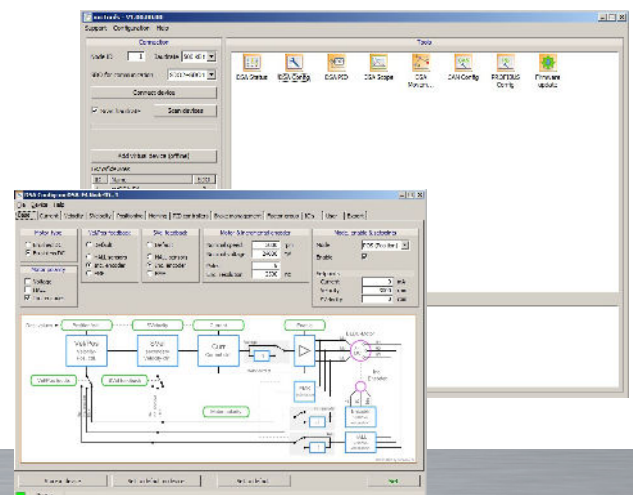

SEE IT BEFORE IT HAPPENS

**MOTOR
POWER**
COMPANY