





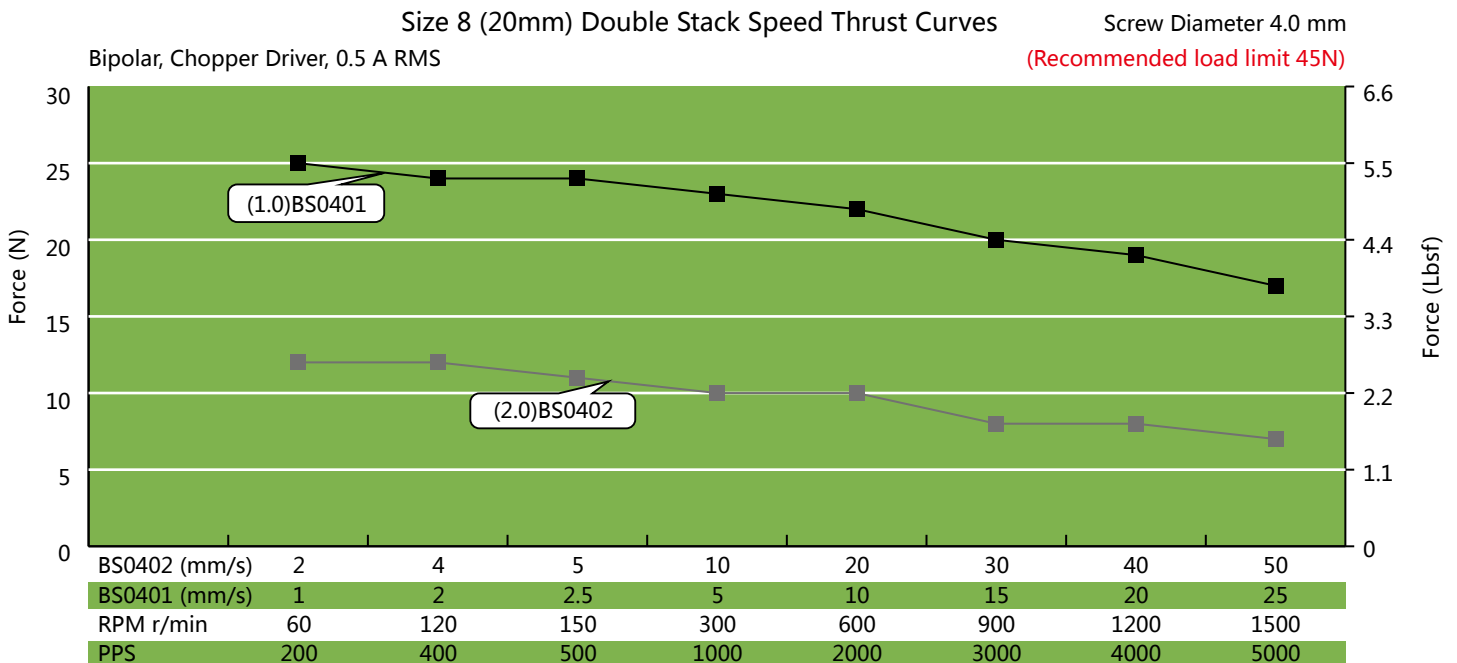

# Size 8 (20 mm) Series

## Size 8 (20mm) Performance Curves

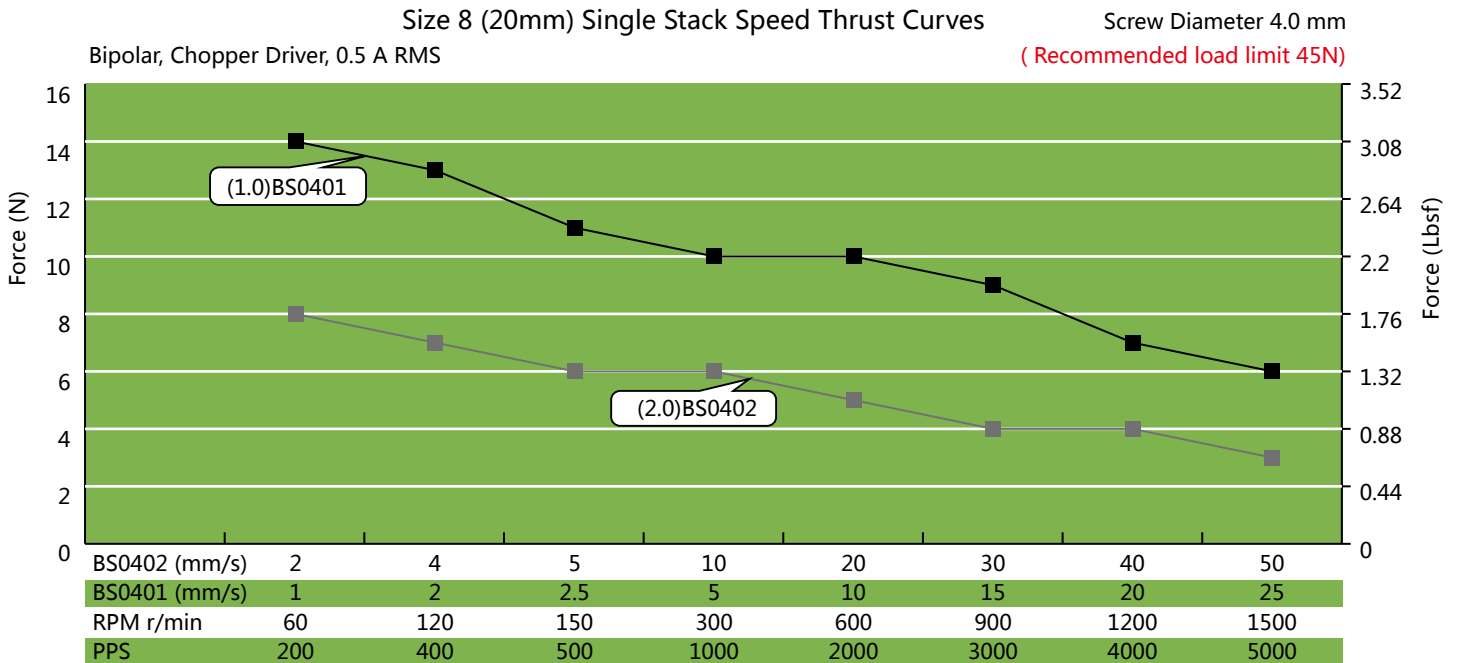

### TEST CONDITION:

Testing Voltage: 24VDC, Driver Model: DS-2422-001, at rated current (rms) pull-in thrust. Motor's thrust will be changed with different voltage and driver. 50% thrust margin is recommended.