
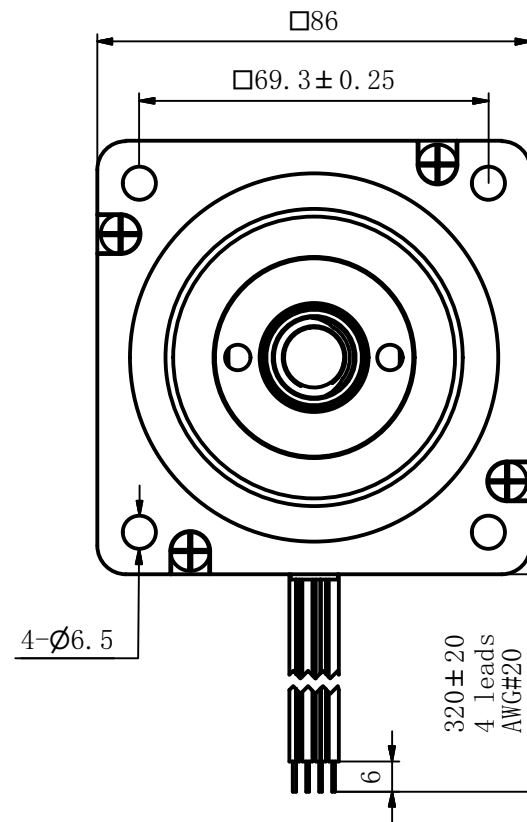


REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY
01	2013/10/08	wire color changed	

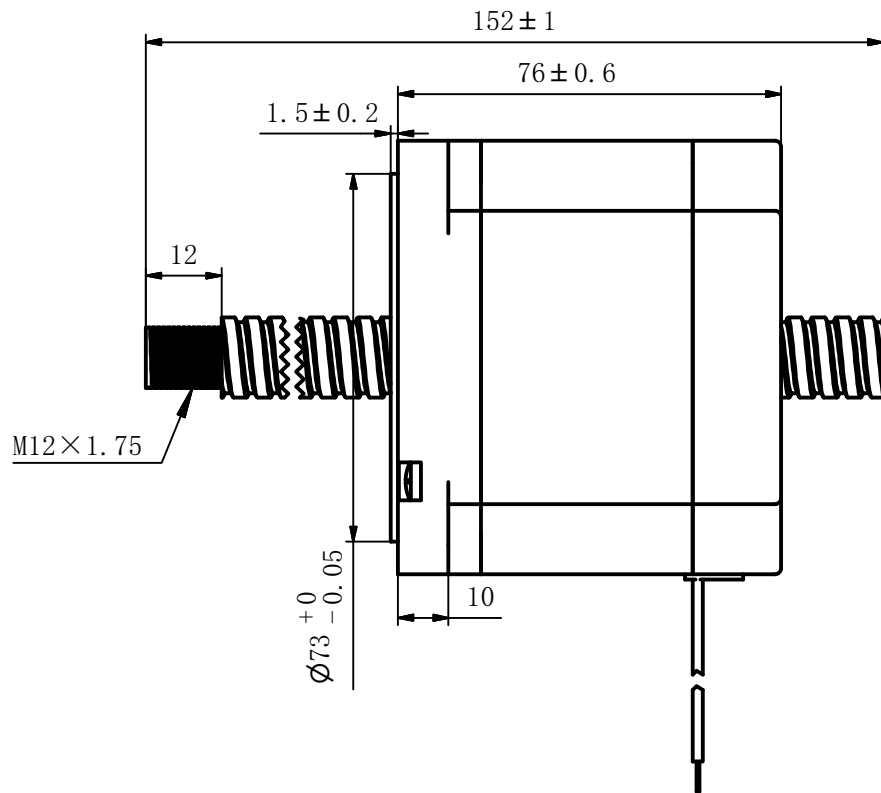

TECHNICAL PARAMETERS

Motor's phase	2
Step angle	1.8°
Rated voltage	5.7 V
Rated current/phase	3.0 A
Resistance/phase	1.9 Ω ± 10%
Inductance/phase	15mH ± 20%
Linear travel per step	0.0127mm/step
Lead screw diameter	Φ 15.875mm
Lead screw lead	2.54mm
Insulation class	B
Insulation resistance	100M Ω (500VDC)
Heat rise	80°C
Motor weight	2.5 kg

CE 34N2080K4-300-001
 RoHS DINGS' MOTION
 Work order
 DATE REV01



NOTICE TO PERSONS RECEIVING THIS DRAWING


THIS DRAWING IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POSSESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING, THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.

CUSTOMER

KOCO MOTION

WIRING CHART

EXCITING SEQUENCE



CCW	→			
Red A+	+		-	
Red/wht A-	-		+	
Grn B+		+		-
Grn/wht B-		-		+
CW	←			

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-cK.			
LINEAR		ANGLUR	
0~3	±0.2	0~10	±1.5°
3~6	±0.5	10~50	±1°
6~30	±0.8	50~120	±30'
30~120	±1.5	120~400	±15'

DRAWN	HC	DATE	2013/10/8
APPRVD		DATE	
MODEL	34N2080K4-300-001		

DINGS'

SIZE	A3	SHEET	1 OF 1
SCALE	1: 1	REV	00