
REVISION
REV. DATE DESCRIPTION DRAWN BY

17H2O41−100 C∈ DINGS' MOTION ROHS DATE

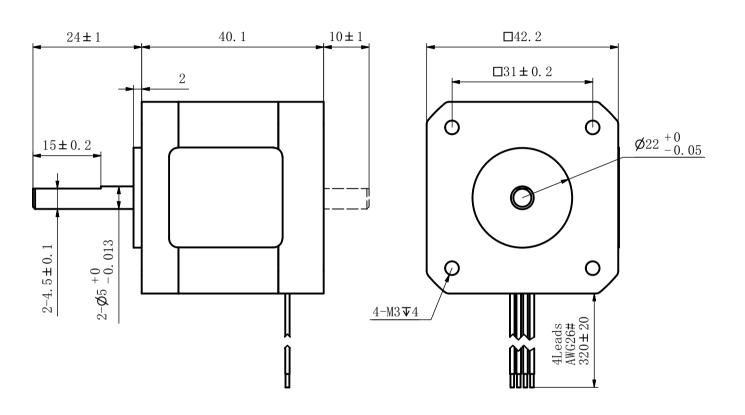

Motor's phase	2
Step angle	1.8°
Rated current/phase	1.0 A
Resistance/phase	4.3 Ω ± 10%
Inductance/phase	8.0mH \pm 20%
Holding torque	0.4 N.m
Rotary inertia	54g. cm ²
Insulation class	В
Insulation resistance	100M Ω (500VDC)
Heat rise	80℃
Motor weight	0. 3kg

															.0 0 0 1			0, 0110	
CUSTOMER						RECEIPT OR POCES	SSION THEREOF DO	NDITIONALLY ISSU DES NOT CONFER T	IED, AND FOR THE O TRANSFER ANY	RIGHT IN THE SUE	INFORMING LICENS SJECT MATTER OF TH	HE DRAWING. THE D	ESIGN, CONSTRUCTION	I, TECHNICAL	L INFORM	ATION AND	ALL OTHER	CUSTOMERS THEREOF, SUBJECT MATTER SHOWN	
WIRING CHART	EXCIT:	ING S	SEQL	JENC	Ε	IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATECONTRACTORS.													
A+		\longrightarrow					UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.				DRAWN DATE			DINCS					
		+		-		LINE	AR	ANGULAR		APPRVD		DATE							
Λ		-		+		0~3	± 0.2	0~10	±1.5°										
(WWW)			+		-	3~6	± 0.5	10~50		MODEL		17H2041-100		SIZE	А3	SHEET	1 OF		
			_		+	2 20			-	MODEL	17H2041-							-⊏⊢(⊕)-	
£ &			\leftarrow		$6 \sim 30$ $30 \sim 120$	±0.8	$50 \sim 120$ $120 \sim 400$	±30' ±15'	1	1			SCALE	1: 1	REV	00	7 4		
	· • • • • • • • • • • • • • • • • • • •				30 ~ 120	1. O	120 -400	■ <u>1</u> 15	I	1					i 1				