
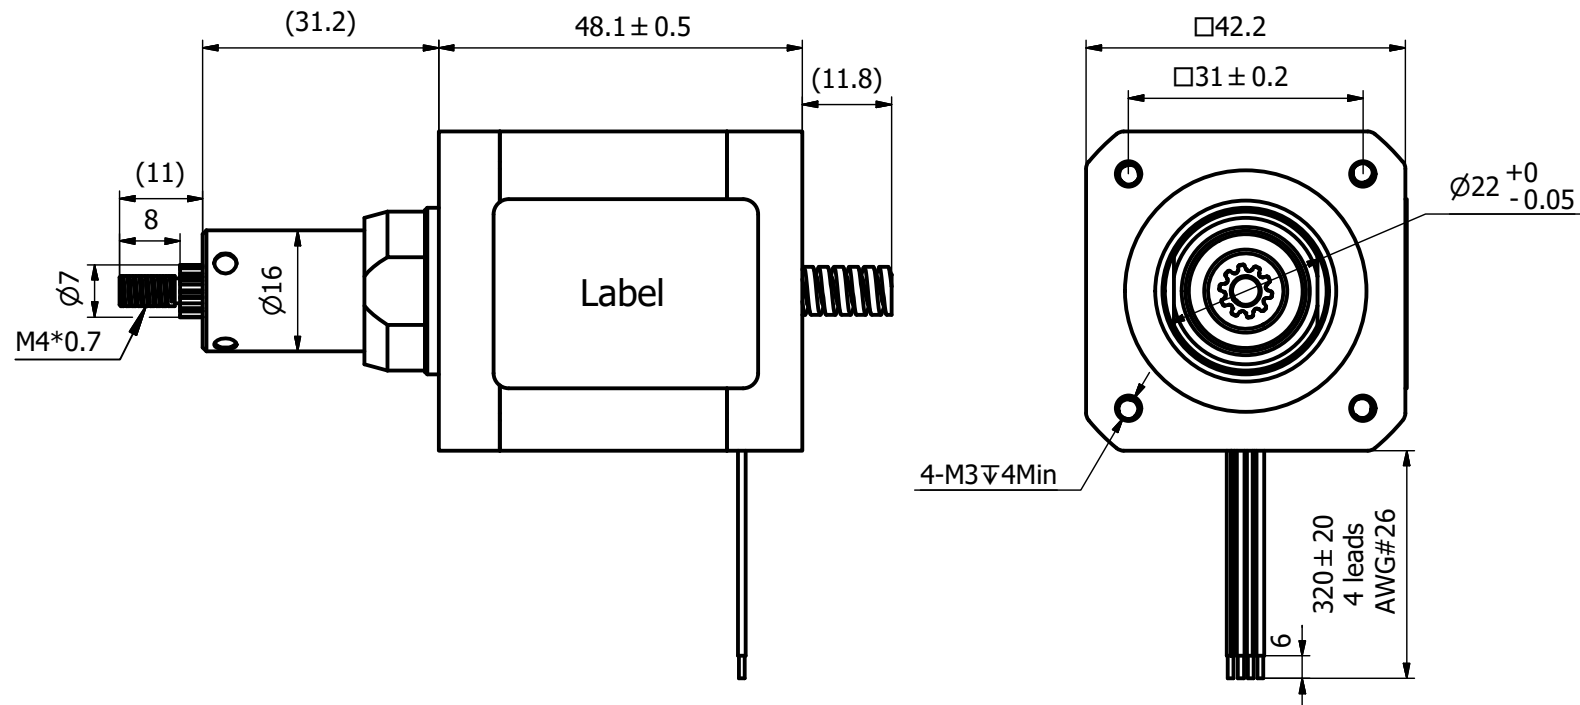



REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY



Notes,  
1.To maximize output force and life of linear actuators,  
radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING																	
WIRING CHART		EXCITATION SEQUENCE				UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.				DRAWN	Alice	DATE	2020/11/12	DINGS'					
		CW	→			LINEAR		ANGULAR		APPRVD		DATE							
		Red A+	+		-		0~3	±0.2	0~10	±1.5°	MODEL	17K22-25.4			SIZE	A3	SHEET	1 OF 1	
		Red/wht A-	-		+		3~6	±0.5	10~50	±1°									
		Green B+		+		-	6~30	±0.8	50~120	±30'									
		Grn/wht B-		-		+	30~120	±1.5	120~400	±15'									
		CCW	←												SCALE	1: 1	REV	00	

**DINGS**