REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY

24H2068-400
CE DINGS' MOTION
RoHS DATE

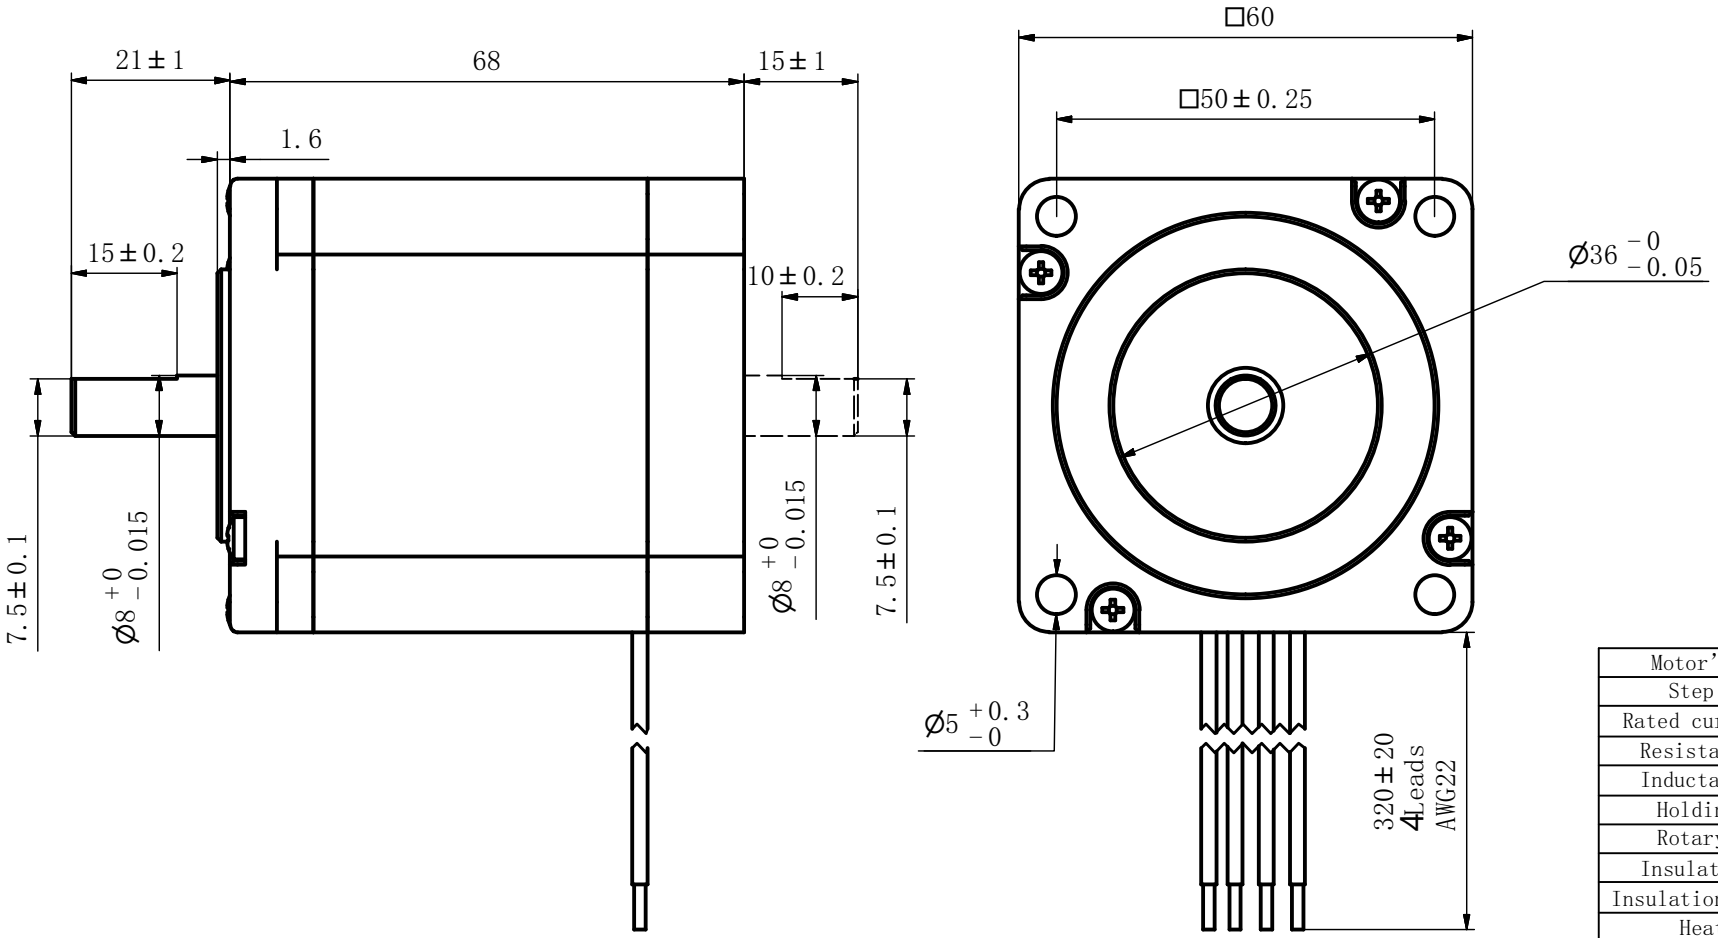

Motor’s phase	2
Step angle	1.8°
Rated current/phase	4.0 A
Resistance/phase	0.6Ω±10%
Inductance/phase	1.9mH±20%
Holding torque	2.1N.m
Rotary inertia	490g.cm^2
Insulation class	B
Insulation resistance	100MΩ (500VDC)
Heat rise	80℃
Motor weight	1.0kg

CUSTOMER

WIRING CHART



EXCITING SEQUENCE

	→			
	+		−	
	−		+	
		+		−
		−		+
	←			

NOTICE TO PERSONS RECEIVING THIS DRAWING
THIS POSSESSION IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POCESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATECONTRACTORS.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-cK.

LINEAR		ANGULAR	
0～3	±0.2	0～10	±1.5°
3～6	±0.5	10～50	±1°
6～30	±0.8	50～120	±30’
30～120	±1.5	120～400	±15’

DRAWN		DATE	
APPRVD		DATE	
MODEL	24H2068-400		

DINGS’

SIZE	A3	SHEET	1 OF 1
SCALE	1：1	REV	00