

REVISION REV. DATE DESCRIPTION DRAWN BY



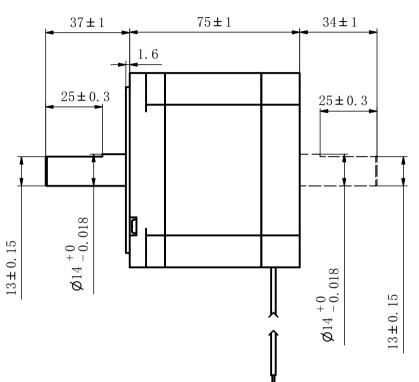

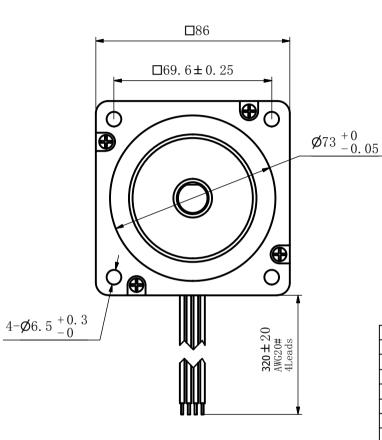

$4-\emptyset6.5^{+0.3}_{-0}$		02		Motor's phase	2	
0.	MIN	320 ± 20 AWG20# 4Leads		Step angle	1.8°	
H & H	1haf)	320 WG:		Rated current/phase	4.5 A	
' 		(1) 4 4		Resistance/phase	$0.6 \Omega \pm 10\%$	
				Inductance/phase	$4.5 \mathrm{mH} \pm 20\%$	
	YYYY	,		Holding torque	4. 5N. m	
		<u>.</u>		Rotary inertia	1800g. cm ²	
				Insulation class	В	
				Insulation resistance	100M Ω (500VDC)	
				Heat rise	80℃	
_				Motor weight	2. 1kg	
NOTICE TO PERSONS RECEIVING THIS DRAWING THIS POSSESSION IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF,						

CUSTOMER					
WIRING CHART	EXCIT:	EXCITING SEQUENCE			E
A+ W		\longrightarrow			
		+		-	
A		-		+	
((+		ı
00000					

UNLESS OTHERWISE SPECIFIED ALL
UNLESS UTILITATISE STECTIFIED ALL
DIMENSTONS ADD IN MILLIMSTEDS AND
DIMENSIONS ARE IN MILLIMETERS AND
TOLERANCES ARE AS BELOW PER ISO2768-cK.
TOLERANCES ARE AS DELOW LER 1302100 CR.

 ± 0.2

 ± 0.5

 ± 0.8

ANGULAR

 $\pm 15'$

 $0 \sim 10$

 $10 \sim 50$

 $50 \sim 120$

120~400

LINEAR

 $3 \sim 6$

 $6 \sim 30$

30~120

L D 768-cK.	DRAWN		DATE		
ıR	APPRVD		DATE		
±1.5°					
±1°	MODEL	34H2075-450			
±30'	ITODEL	34112013	400		

RECEIPT OR POCESSION THEREOF DOES NOT CONFER TO TRANSFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING. THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATECONTRACTORS.

D	N	GS	_

A3 SHEET 1 OF SIZE REV

