


REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY

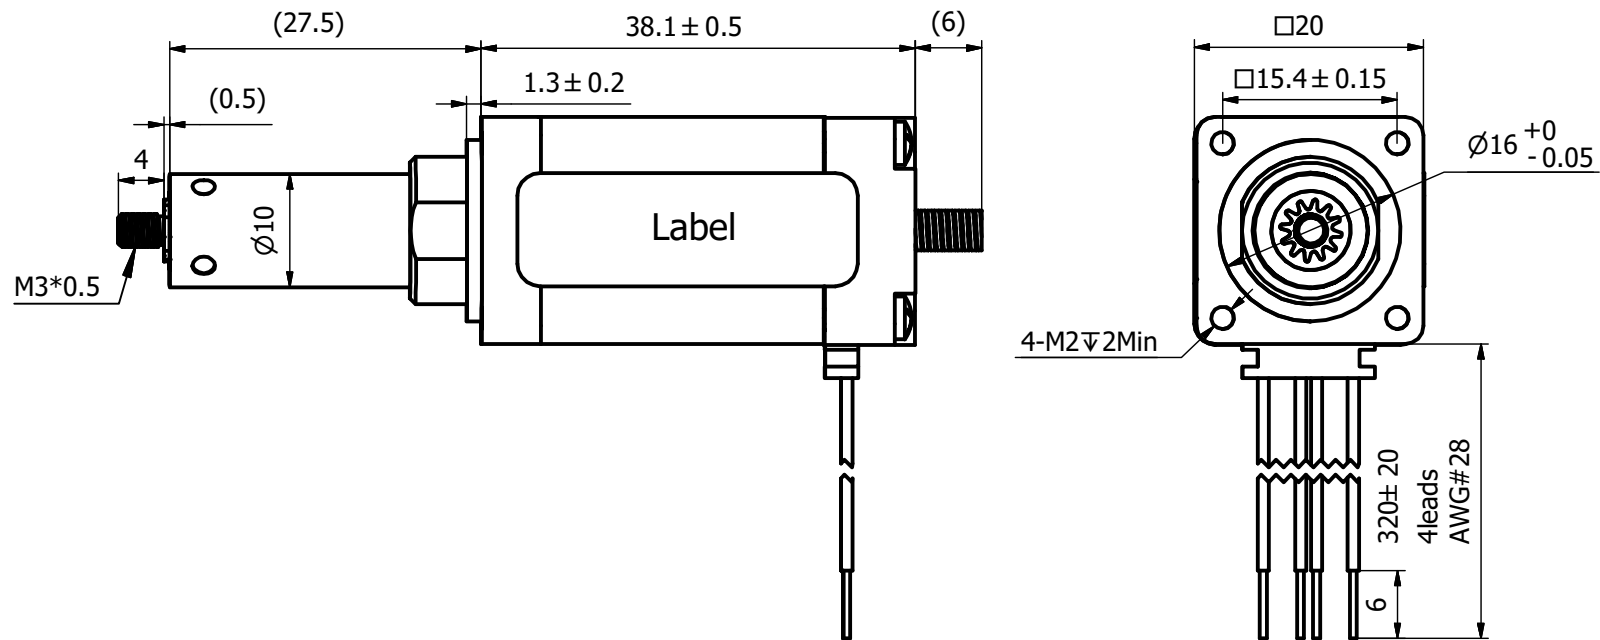

Notes,
1.To maximize output force and life of linear actuators,
radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING									
WIRING CHART 		EXCITATION SEQUENCE CW → CCW ←		UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.				DRAWN Alice	DATE 2020/11/12		
				LINEAR ANGULAR				APPRVD	DATE		
A+ A- B+ B-		+ - + -		0~3	±0.2	0~10	±1.5°	MODEL 8K22-25.4	SIZE A3 SHEET 1 OF 1 SCALE 1: 1 REV 00		
				3~6	±0.5	10~50	±1°				
				6~30	±0.8	50~120	±30'				
				30~120	±1.5	120~400	±15'				