






## TRANSPORTATION AND STORAGE

The storage time is primarily limited by the service life of the lubricants in the bearings; do not store the product for more than 36 months. It is recommended to periodically operate the motor.

TOPIC	UNIT	VALUE
Temperature	[°C]	-40 ... 70
Relative humidity (non-condensing)	[%]	≤75
Set of class combinations as per IEC 60721-3-2		IE 21

## HANDLING INSTRUCTION

Consider the mass of the product when mounting the motor. It may be necessary to use suitable lifting gear in two points.

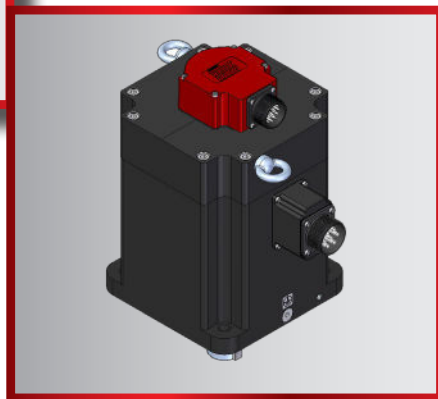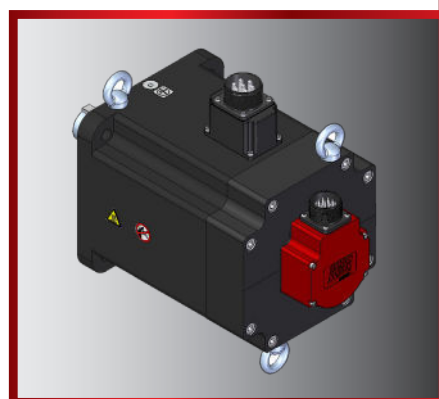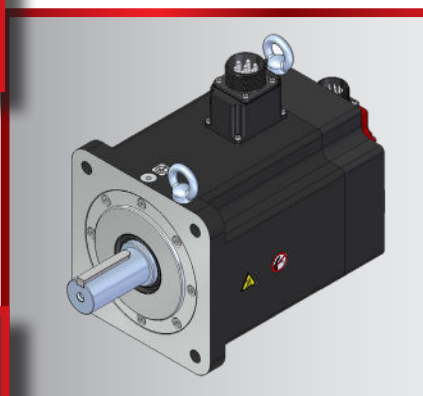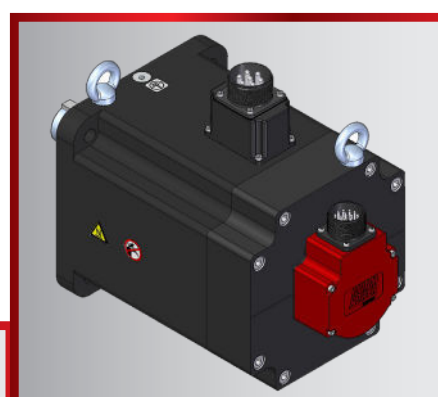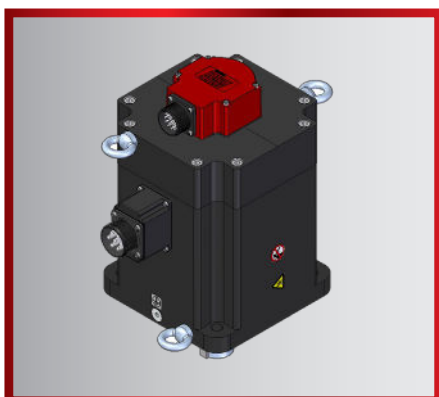

SEE IT BEFORE IT HAPPENS

**MOTOR  
POWER**  
COMPANY