


Liberty MDrive 57mm Rotary Stepper Motor

Programmable Motion Control NEMA 23 integrated 1.8° 2-phase stepper motor & control electronics

   REACH IP20/IP65

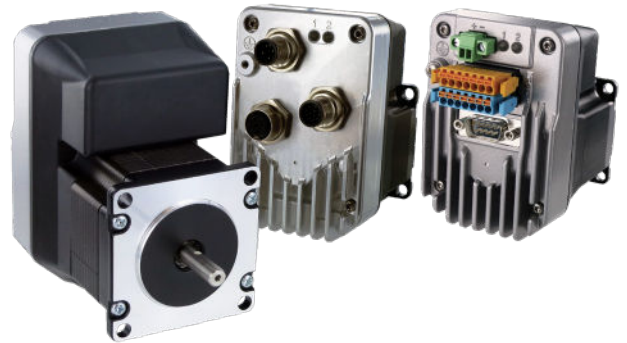

PRODUCT OVERVIEW

Robust Liberty MDrive (LMD) Motion Control products integrate 1.8° 2-phase stepper motors with control electronics. Included are on-board programmable motion controller for stand-alone operation, and optional hMT closed loop performance.

hMT closed loop performance is available in products with either a multi-turn absolute encoder or incremental magnetic encoder. Closed loop performance maintains functional motor control to prevent loss of synchronization, offers variable current control, torque control, and use more of the motor's full torque range.

Multi-turn absolute encoders may benefit users by retaining position information when powered down. This can eliminate homing routines and reduce setup time at system startup.

Product parameterization, programming and monitoring is through user-friendly software with an RS-422/485 serial interface. Settings can be downloaded and stored in non-volatile memory.

Especially well suited for industrial applications, products include an IP65 rated version with circular M12 connectors. A high torque motor (LMH•M57) is also available, increasing torque up to 50%.

Compact Liberty MDrive products can reduce machine complexity, size and cost in many stepper and servo motor applications. Their high degree of integration can increase system reliability by reducing the number of individual components, eliminating multiple potential failure points.

FEATURES AND BENEFITS

- Compact NEMA 23 1.8° 2-phase stepper motor integrated with control electronics, including programmable motion controller
- Standard Torque or Premium High Torque options
- Available in 1, 2, or 3 stack lengths
- Two (2) connection options available: Pluggable terminal and M12 circular. Pluggable model is IP20 rated, M12 circular connector model is IP20 or IP65 rated with proper motor shaft sealing
- RS-422/485 Serial Interface communication
- User interface available for download, providing quick & easy commissioning
- Multi-turn absolute or incremental magnetic encoder options
- Operating temperature of -20 to 50 °C (-4 ... 122 °F)
- Nominal operating voltage: 24/48 VDC
Maximum Current: 3.5A
- User selectable Temperature Warning (Range: 0° - 84° C (32° - 183.2° F))
- 4 year conditional warranty



Additional setup, quick reference information, and supporting documents are available for download from the Novanta IMS download website <https://novantaims.com/downloads/>

Three-dimensional depictions of this product are available for download from <https://novantaims.com/downloads/3dconfigurator/>



To select from the available features and build the LMD integrated stepper motor to fit your needs, use the Novanta IMS part number builder, available online at <https://novantaims.com/resources/part-number-builders/>




LMDM•57 Programmable Motion Control

Motor Performance

Motor	Stack length	LMD•57 Standard Torque			LMH•57 High Torque		
		Single	Double	Triple	Single	Double	Triple
Holding torque	oz-in	103	159	242	152	264	416
	N-cm	73	112	171	107	186	294
Detent torque	oz-in	3.9	5.6	9.7	8.5	14.2	21.2
	N-cm	2.7	3.9	6.9	6.0	10	15
Rotor inertia	oz-in-sec ²	0.0025	0.0037	0.0065	0.0019	0.0030	0.0065
	kg-cm ²	0.18	0.26	0.46	0.14	0.22	0.46
Radial load limit, center of shaft	lbs	15	15	15	15	15	15
	kg	6.8	6.8	6.8	6.8	6.8	6.8
Axial load limit @ 1500rpm (5000 full steps/sec)	lbs	20	20	20	20	20	20
	kg	9	9	9	9	9	9
Weight (motor+driver)	oz	26.4	31.2	44.0	26.4	31.2	44.0
	g	748	885	1247	748	885	1247

LM•57 NEMA 23 Speed Torque

Test conditions: 100% current with damper simulating load

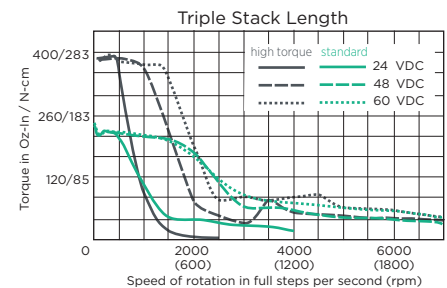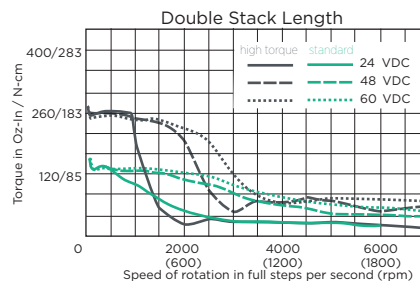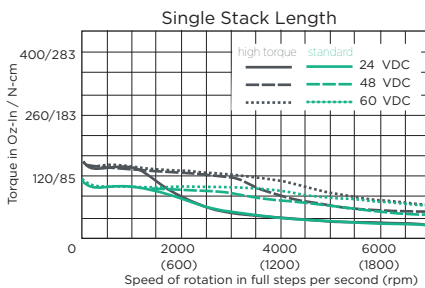

Accessories

Description	Length feet (m)	Part Number	Description	Length feet (m)	Part Number
Communication Converter USB-pluggable converter to set/program communication parameters in 32- or 64-bit Windows®			Straight Configuration Cordsets (IP65) Shielded cables pre-wired with straight M12 mating connectors		
 Mates to DB9 connector	6.0 (1.8)	MD-CC404-000	 Communication cordset w/ leads, mates to 5-pin female connector	10.0 (3.0)	MD-CS600-000
 Mates to M12 5-pin female connector	6.0 (1.8)	MD-CC405-000	 I/O cordset w/ leads, mates to 12-pin male connector	10.0 (3.0)	MD-CS610-000
Back-up Battery Pack for Absolute Encoder Models Extend stored position data up to 5-years for 1 to 6 LMDs with absolute encoder			 Power cordset w/ leads, mates to 4-pin male connector	10.0 (3.0)	MD-CS620-000
 Battery pack, DIN-rail mount. Uses 3 AA batteries, not provided	—	ICP0531	Right Angle Configuration Cordsets (IP65) Shielded cables pre-wired with right angled M12 mating connectors		
 LMD mating cable(s) with crimp connector to flying lead end	3.3 (1.0)	PD02-0531-FL1	 I/O cordset w/ leads, mates to 12-pin male connector	10.0 (3.0)	MD-CS611-000
 PLC mating cable with crimp connector to flying lead end	3.3 (1.0)	PD04-0531-FL1	 Power cordset w/ leads, mates to 4-pin male connector	10.0 (3.0)	MD-CS621-000
Cable Accessory Kit (IP65) Kits for M12 products			Replacement Mating Connector Kit (IP20) Kits for pluggable products		
 Includes two M12 screw plugs and one sealing cap	—	CK-16	 Includes one 2-pin power mate, and two 7-pin multifunction mates	—	CK-15