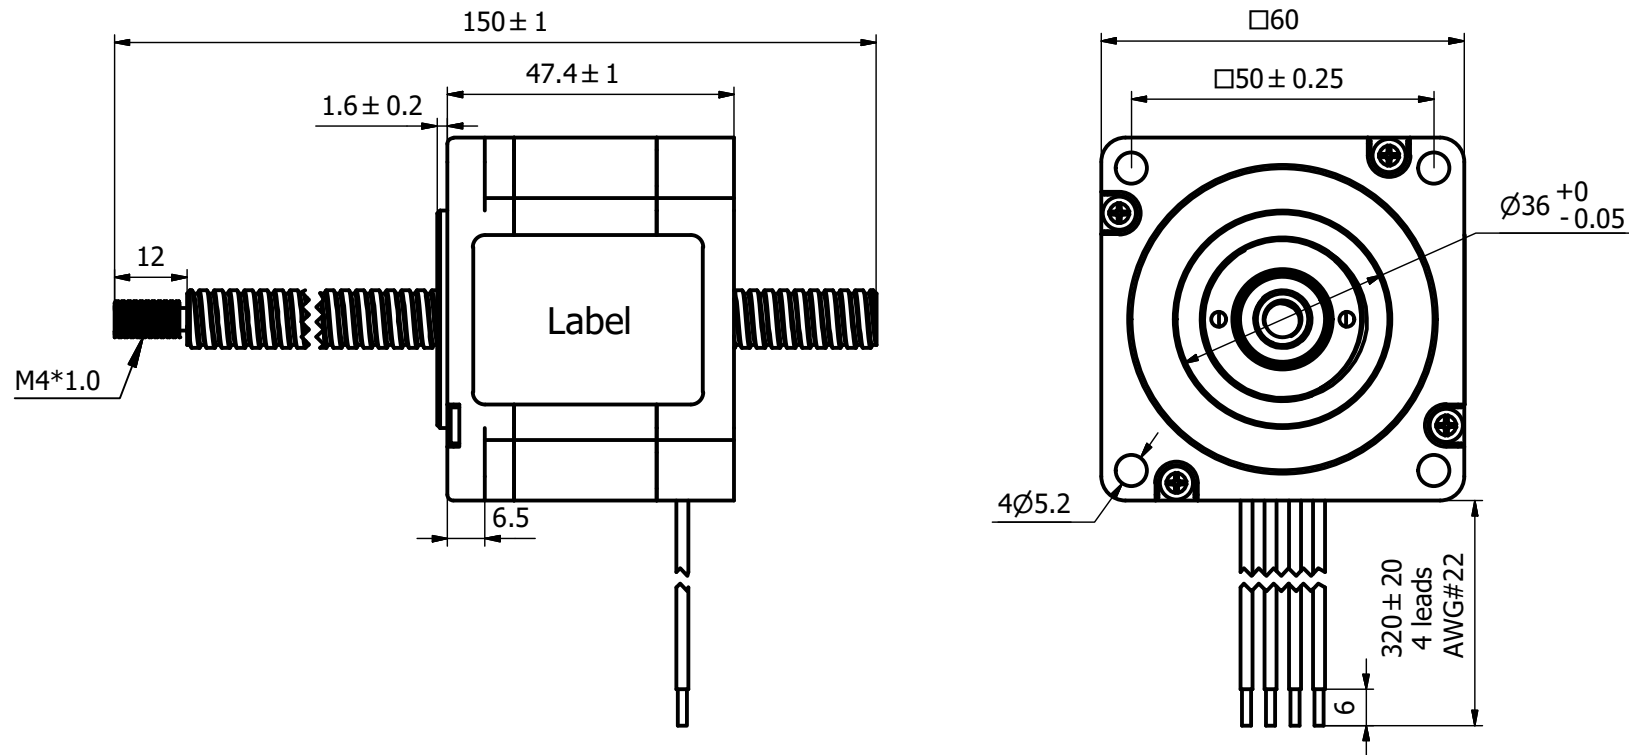





REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY



Notes,
 1.To maximize output force and life of linear actuators,
 radial load on lead screws should be avoided or be kept at a minimum.

CUSTOMER		NOTICE TO PERSONS RECEIVING THIS DRAWING																									
		EXCITATION SEQUENCE						UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-ck.								DRAWN		Alice		DATE		2020/11/13					
		CW		→				LINEAR				ANGULAR				APPRVD				DATE							
		Red A+	+		-			0~3	±0.2	0~10	±1.5°	MODEL		24N21-150		SIZE		A3		SHEET		1 OF 1					
		Red/wht A-	-		+			3~6	±0.5	10~50	±1°																
		Green B+		+		-		6~30	±0.8	50~120	±30'																
Grn/wht B-		-		+		30~120	±1.5	120~400	±15'																		
CCW		←																									
																						</					

DINGS