

Liberty MDrive 42mm Rotary Stepper Motor

Pulse & Direction NEMA 17 integrated 1.8° 2-phase stepper motor & control electronics

UL LISTED US CE RoHS REACH IP20/IP65



PRODUCT OVERVIEW

Robust Liberty MDrive Pulse & Direction products integrate 1.8° 2-phase stepper motors with on-board control electronics and hMT closed loop performance. Products have 4 modes of operation: pulse/direction input, variable speed control, constant velocity drive, and variable torque control.

With an RS-422/485 serial interface, settings can be downloaded and stored in nonvolatile memory. Commissioning, parameterization and monitoring is done via the user-friendly software provided.

Products may include an encoder, which is internal to the unit so no extra space is required. Encoders perform stall detection, position maintenance and find index mark, in addition to monitoring motor shaft position for real time closed loop feedback.

Especially well suited for industrial applications, products include an IP65 rated version with circular M12 connectors.

Liberty MDrive products can reduce machine complexity, size and cost in many stepper and servo motor applications. Their high degree of integration can increase system reliability by reducing the number of individual components, eliminating multiple potential failure points.

FEATURES AND BENEFITS

- Compact NEMA 17 1.8° 2-phase stepper motor integrated with control electronics, including programmable motion controller
- Available in 1, 2, or 3 stack lengths
- Two (2) connection options available: Pluggable terminal and M12 circular. Pluggable model is IP20 rated, M12 circular connector model is IP20 or IP65 rated with proper motor shaft sealing
- RS-422/485 Serial Interface communication
- User interface available for download, providing quick & easy commissioning
- Incremental magnetic encoder available
- Operating temperature of -20 to 50 °C (-4 ... 122 °F)
- Nominal operating voltage: 24/48 VDC
Maximum Current: 2.0A
- User selectable Temperature Warning (Range: 0° - 84° C (32° - 183.2° F))
- 4 year conditional warranty



Additional setup, quick reference information, and supporting documents are available for download from the Novanta IMS download website <https://novantaims.com/downloads/>

Three-dimensional depictions of this product are available for download from <https://novantaims.com/downloads/3dconfigurator/>



To select from the available features and build the LMD integrated stepper motor to fit your needs, use the Novanta IMS part number builder, available online at <https://novantaims.com/resources/part-number-builders/>




LMDP•42 Pulse & Direction

Motor Performance

Motor	Stack length	Single	Double	Triple
Holding torque	oz-in	44	58	88
	N-cm	31	41	62
Detent torque	oz-in	1.7	2.1	3.5
	N-cm	1.2	1.5	2.5
Rotor inertia	oz-in-sec ²	0.0005	0.0008	0.0012
	kg-cm ²	0.038	0.057	0.082
Radial load limit, center of shaft	lbs	8.5	8.5	8.5
	kg	3.8	3.8	3.8
Axial load limit @ 1500rpm (5000 full steps/sec)	lbs	10	10	10
	kg	4.5	4.5	4.5
Weight (motor+driver)	oz	13.6	16.0	18.4
	g	385	454	522

LM•42 NEMA 17 Speed Torque

Test conditions: 100% current with damper simulating load

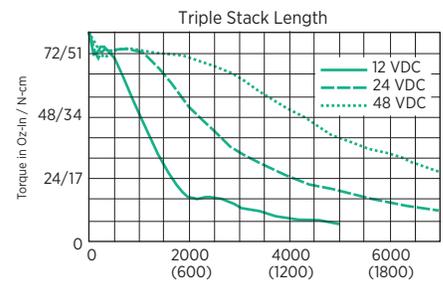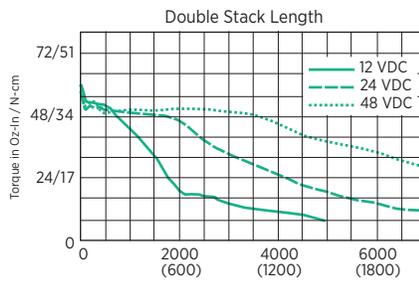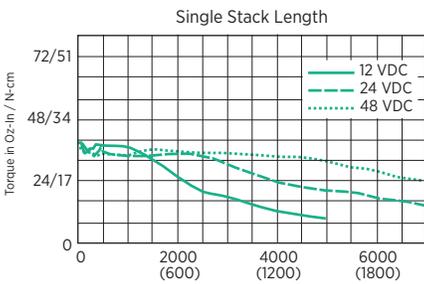

Accessories

Description	Length feet (m)	Part Number	Description	Length feet (m)	Part Number
 Communication Converter USB-pluggable converter to set/program communication parameters in 32- or 64-bit Windows®			 Straight Configuration Cordsets (IP65) Shielded cables pre-wired with straight M12 mating connectors		
 Mates to DB9 connector	6.0 (1.8)	MD-CC404-000	 Communication cordset w/ leads, mates to 5-pin female connector	10.0 (3.0)	MD-CS600-000
 Mates to M12 5-pin female connector	6.0 (1.8)	MD-CC405-000	 I/O cordset w/ leads, mates to 12-pin female connector	10.0 (3.0)	MD-CS630-000
 Cable Accessory Kit (IP65) Kits for M12 products			 Power cordset w/ leads, mates to 4-pin male connector	10.0 (3.0)	MD-CS620-000
 Includes two M12 screw plugs and one sealing cap	—	CK-16	 Right Angle Configuration Cordsets (IP65) Shielded cables pre-wired with right angled M12 mating connectors		
 Replacement Mating Connector Kit (IP20) Kits for pluggable products			 Power cordset w/ leads, mates to 4-pin male connector	10.0 (3.0)	MD-CS621-000
 Includes one 2-pin power mate, and two 7-pin multifunction mates	—	CK-14			