




|                                                |                |
|------------------------------------------------|----------------|
| Rated Voltage (Vac)                            | 220            |
| Rated Power (w)                                | 100            |
| Rated Torque (N.m)                             | 0.32           |
| Peak Torque (N.m)                              | 0.95           |
| Rated Speed (rpm)                              | 3000           |
| Peak Speed (rpm)                               | 5000           |
| Rated Current (Amp)                            | 0.92           |
| Peak Current (Amp)                             | 2.85           |
| Torque Const (N.m/Amp)                         | 0.38           |
| Back EMF Const (V/krpm)                        | 23.13          |
| Resistance (Ω)                                 | 17.71          |
| Inductance (mH)                                | 14.26          |
| Inertia (kg*m <sup>2</sup> *10 <sup>-4</sup> ) | 0.072          |
| Poles                                          | 10             |
| Encoder type                                   | 23bit magnetic |
| IP rating                                      | IP67           |
| Mass (Kg)                                      | 0.54           |

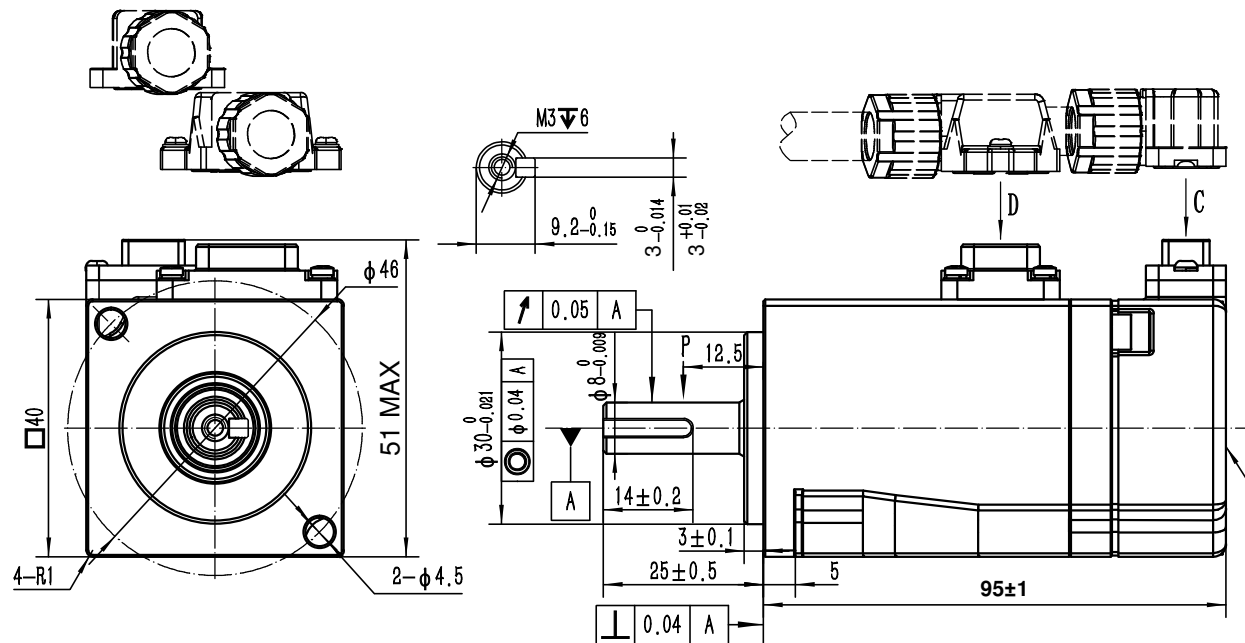


| Wiring details of Power cable connector |       |       |     |         |      |      |
|-----------------------------------------|-------|-------|-----|---------|------|------|
| Pos                                     | 1     | 2     | 3   | 4       | A    | B    |
| Signal                                  | U     | V     | W   | PE      | 0V   | 24V  |
| Color                                   | black | white | red | Yel/Gre | blue | blue |



| Wiring details of encoder cable connector |        |     |       |      |        |       |       |
|-------------------------------------------|--------|-----|-------|------|--------|-------|-------|
| Pos                                       | 1      | 2   | 3     | 4    | 5      | 6     | 7     |
| Signal                                    | PE     | 5V  | 0V    | SD+  | SD-    | Bat+  | Bat-  |
| Color                                     | shield | red | black | blue | yellow | brown | white |

The curve of torque-speed

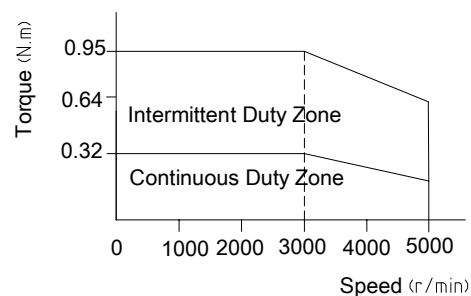

Leadshine Technology Co.,Ltd

ELM1H-0100MA40E

40mm,high inertia,100w servo motor  
23bit magnetic encoder, brake