


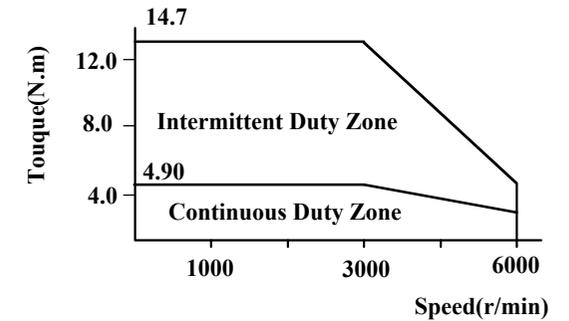
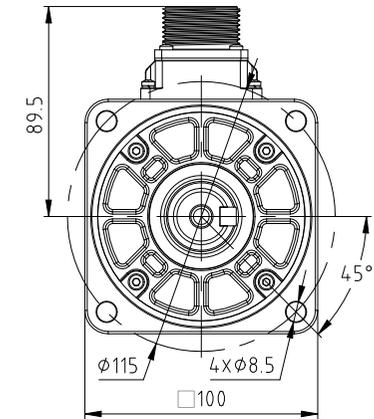


Rated Voltage (Vac)	220
Rated Power (w)	1500
Rated Torque (N.m)	4.9
Peak Torque (N.m)	14.7
Rated Speed (rpm)	3000
Peak Speed (rpm)	6000
Rated Current (Amp)	8.9
Peak Current (Amp)	27.6
Torque Const (N.m/Amp)	0.564
Back EMF Const(V/Krpm)	34.1±5%
Resistance(Ω)	0.30±10%
Inductance(mH)	4.17±20%
Inertia (kg*m ² *10 ⁻⁴)	2.70
Poles	10
Encoder type	23bit optical
IP rating	IP67
Mass (Kg)	4.6
Allowable radial load(N)	686(P)
Allowable thrust load(N)	196

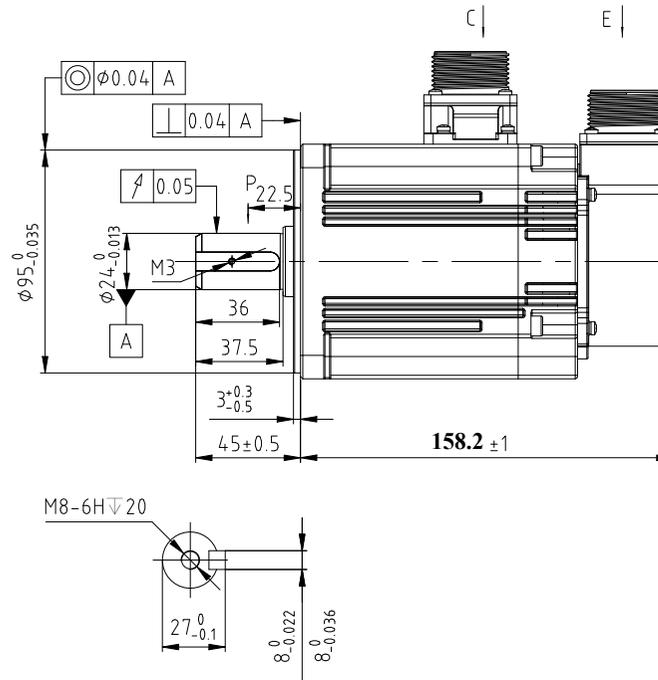

Assignment of encoder connector with brake							
Pos	1	2	3	4	5	6	7
Signal	PE	+5V	GND	SD+	SD-	E+	E-
Color	/	White	Black	Blue	Purple	Red	Yellow



Assignment of power connector				
Pos	1	2	3	4
Signal	PE	U	V	W
Color	Yel/Gre	Blue	Black	Red

Leadshine Technology Co .Ltd

ELM2L-1500LA100F-H MS10A
 100mm,low inertia,1500w servo motor
 23bit optical encoder, no brake