


24H2068-400  
 CE DINGS' MOTION  
 RoHS DATE


REVISION			
REV.	DATE	DESCRIPTION	DRAWN BY

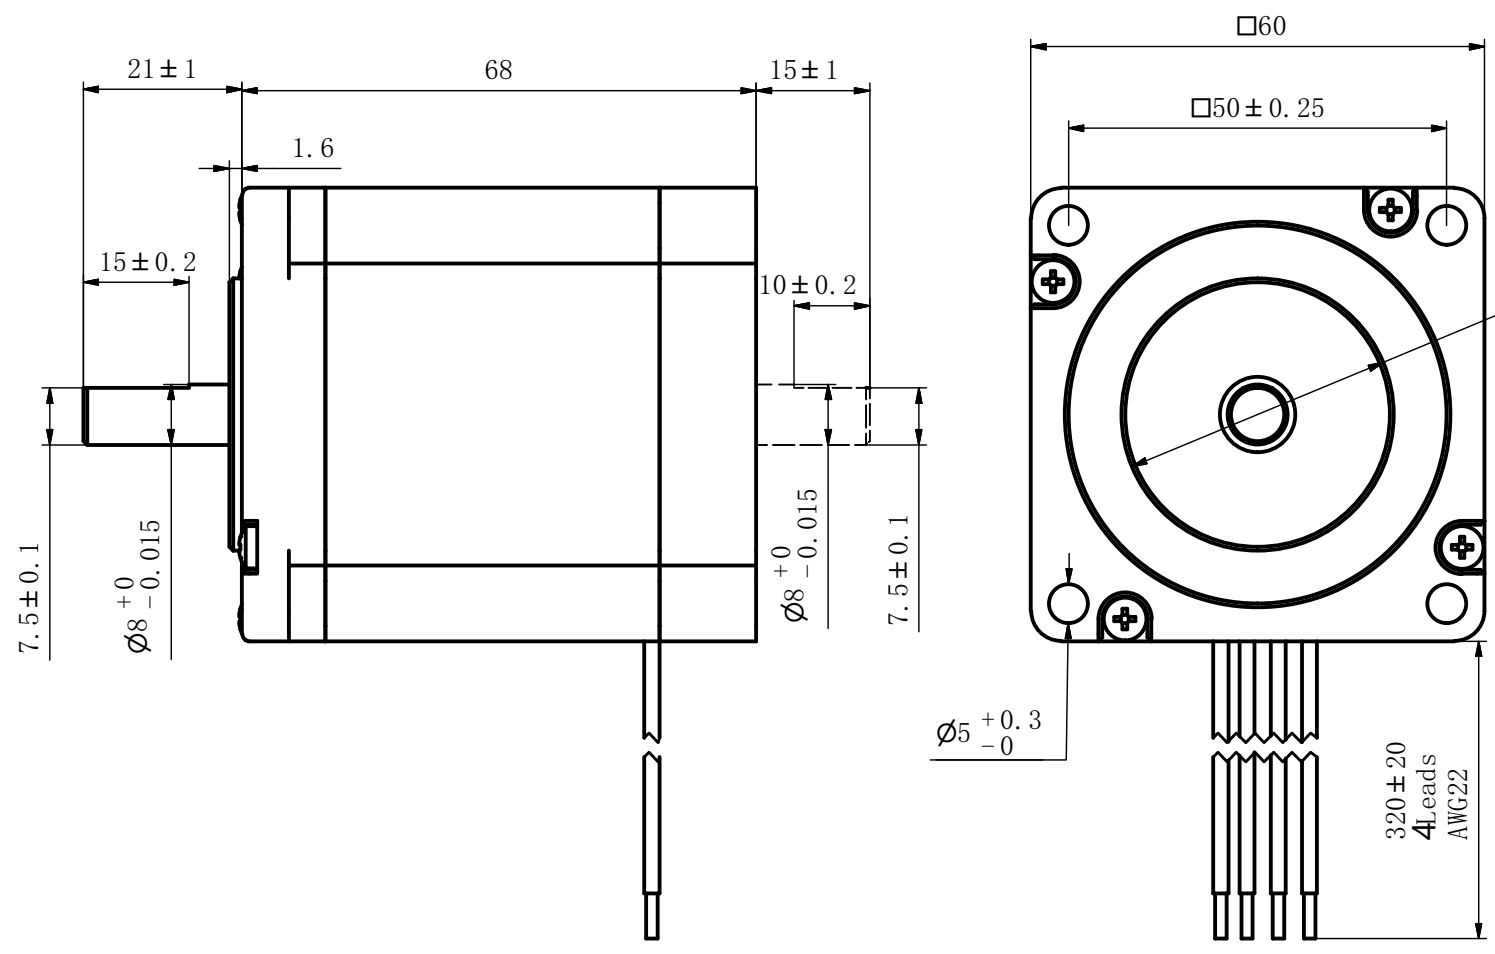

Motor's phase	2
Step angle	1.8°
Rated current/phase	4.0 A
Resistance/phase	0.6 Ω ±10%
Inductance/phase	1.9mH ±20%
Holding torque	2.1N.m
Rotary inertia	490g.cm <sup>2</sup>
Insulation class	B
Insulation resistance	100M Ω (500VDC)
Heat rise	80°C
Motor weight	1.0kg

NOTICE TO PERSONS RECEIVING THIS DRAWING

THIS POSSESSION IS ONLY CONDITIONALLY ISSUED, AND FOR THE SOLE PURPOSE OF INFORMING LICENSEES AND ASSOCIATE CONTRACTORS OF DINGS' MOTION, AND VENDORS THERETO AND CUSTOMERS THEREOF, RECEIPT OR POSSESSION THEREOF DOES NOT CONFER ANY RIGHT IN THE SUBJECT MATTER OF THE DRAWING, THE DESIGN, CONSTRUCTION, TECHNICAL INFORMATION AND ALL OTHER SUBJECT MATTER SHOWN IN THIS DRAWING ARE AND REMAIN, EXCEPT AS MAY BE OTHERWISE INDICATED BY WRITTEN NOTICE HEREON, THE EXCLUSIVE PROPERTY OF SAID CORPORATION. THIS DRAWING MAY BE REPRODUCED ONLY BY LICENSEES AND ASSOCIATE CONTRACTORS OF SAID CORPORATION AND ONLY FOR LICENSED MANUFACTURE, AND BY VENDORS MANUFACTURING FOR SAID CORPORATION AND ONLY FOR LICENSEES AND ASSOCIATE CONTRACTORS.

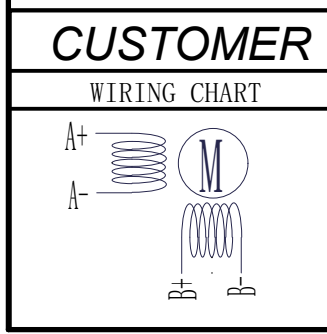

EXCITING SEQUENCE

		→	
	+	-	
	-	+	
		+	-
		-	+
		←	

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MILLIMETERS AND TOLERANCES ARE AS BELOW PER ISO2768-cK.

	LINEAR	ANGULAR
0~3	±0.2	0~10 ±1.5°
3~6	±0.5	10~50 ±1°
6~30	±0.8	50~120 ±30'
30~120	±1.5	120~400 ±15'

DRAWN	DATE
APPRVD	DATE
MODEL	24H2068-400

**DINGS'**

SIZE	A3	SHEET	1 OF
SCALE	1: 1	REV	00